



# GLIDE SMALL VERTICAL MIRROR

KEY


○ Screw Position

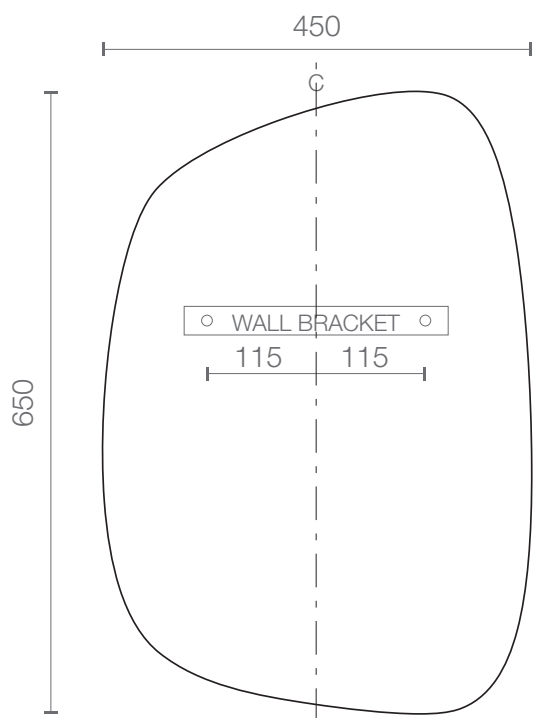

Small Vertical  
LEFT

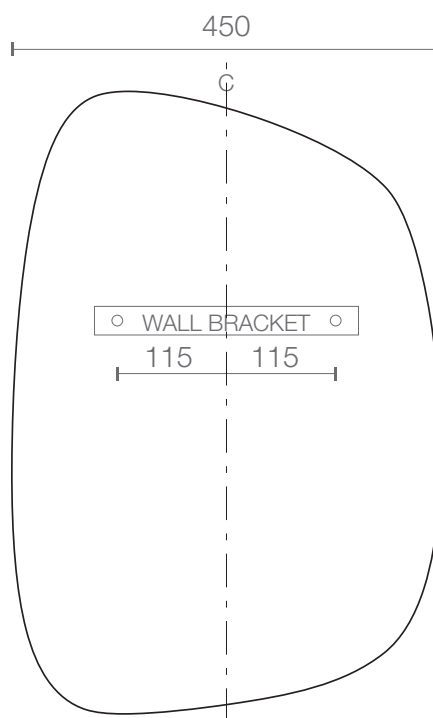

Small Vertical  
RIGHT

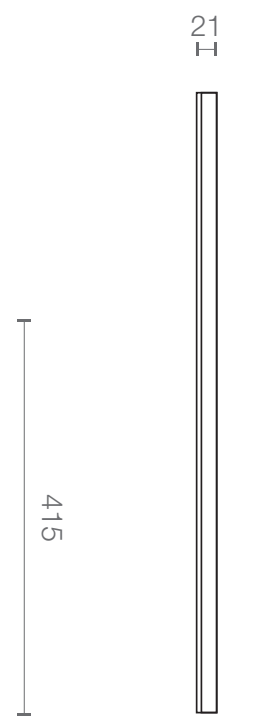

Side Profile

Dimensions are nominal measurements only.

!

Mirror should be installed by a qualified, licensed trades person

! Prior to installation it is important to inspect the Glide mirror to ensure no damage has occurred in transit. If damage has occurred, or a visible defect exists, DO NOT proceed with installation and advise supplier immediately. No warranty claim for damage will be accepted if the mirror is installed. This includes scratches to the glass.

! It is recommended that the mirror is protected during installation. Please Note: Manufacturer will not be liable for the cost of installation or removal of the mirror and the warranty will be voided if damage occurred during or after installation.

!

!

!

1. Place mirror in the desired position and mark the wall at position A shown on the base of the mirror.

!

!

!

!

3. Locate the wall bracket using the dimension table below. Dimension X is the distance from the base mark A to the underside of the bracket. Suitable screws and wall fixings should be used to FIRMLY SECURE the bracket to the wall. IMPORTANT: the wall fixings chosen must accommodate the weight of the mirror.

!

!

!

!

2. Using a level, plumb the centre line up the wall

!

!

Glide Mirror	X (mm)	Weight (kg)
Small Vertical	388	5
Large Vertical	570	8
Large Horizontal	270	8

!

!

!

!

!

!

4. Attach each of the 4 self adhesive Bumpons (supplied) to the back of the mirror at the locations shown.

5. Hang mirror on bracket.

!